



6 Bay Deluxe Swing - 2 VR - 2 TWC - 2 INF



6 Bay Deluxe Swing - 2 VR - 2 TWC - 2 INF

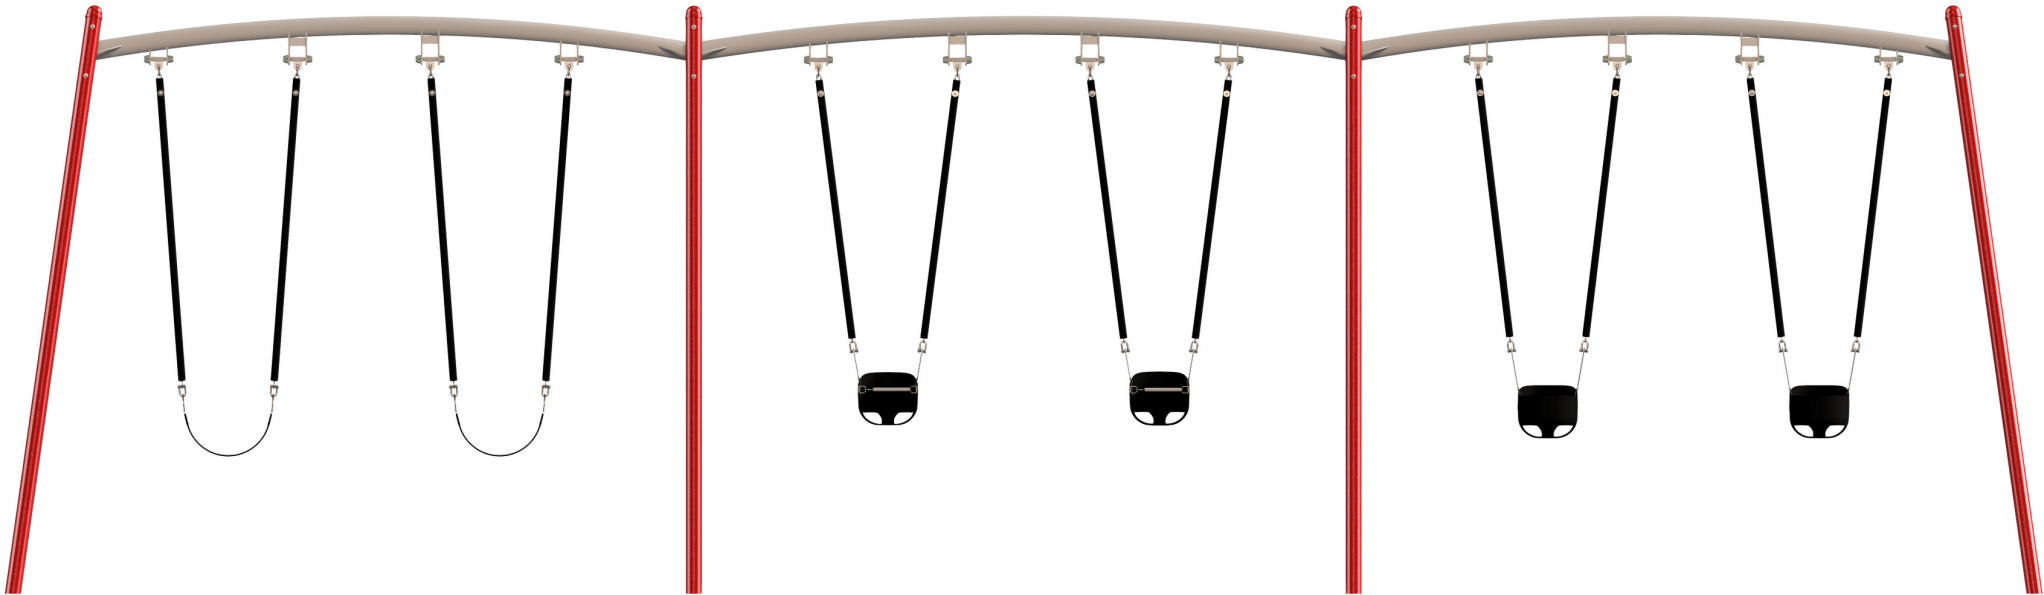

6 Bay Deluxe Swing - 2 VR - 2 TWC - 2 INF


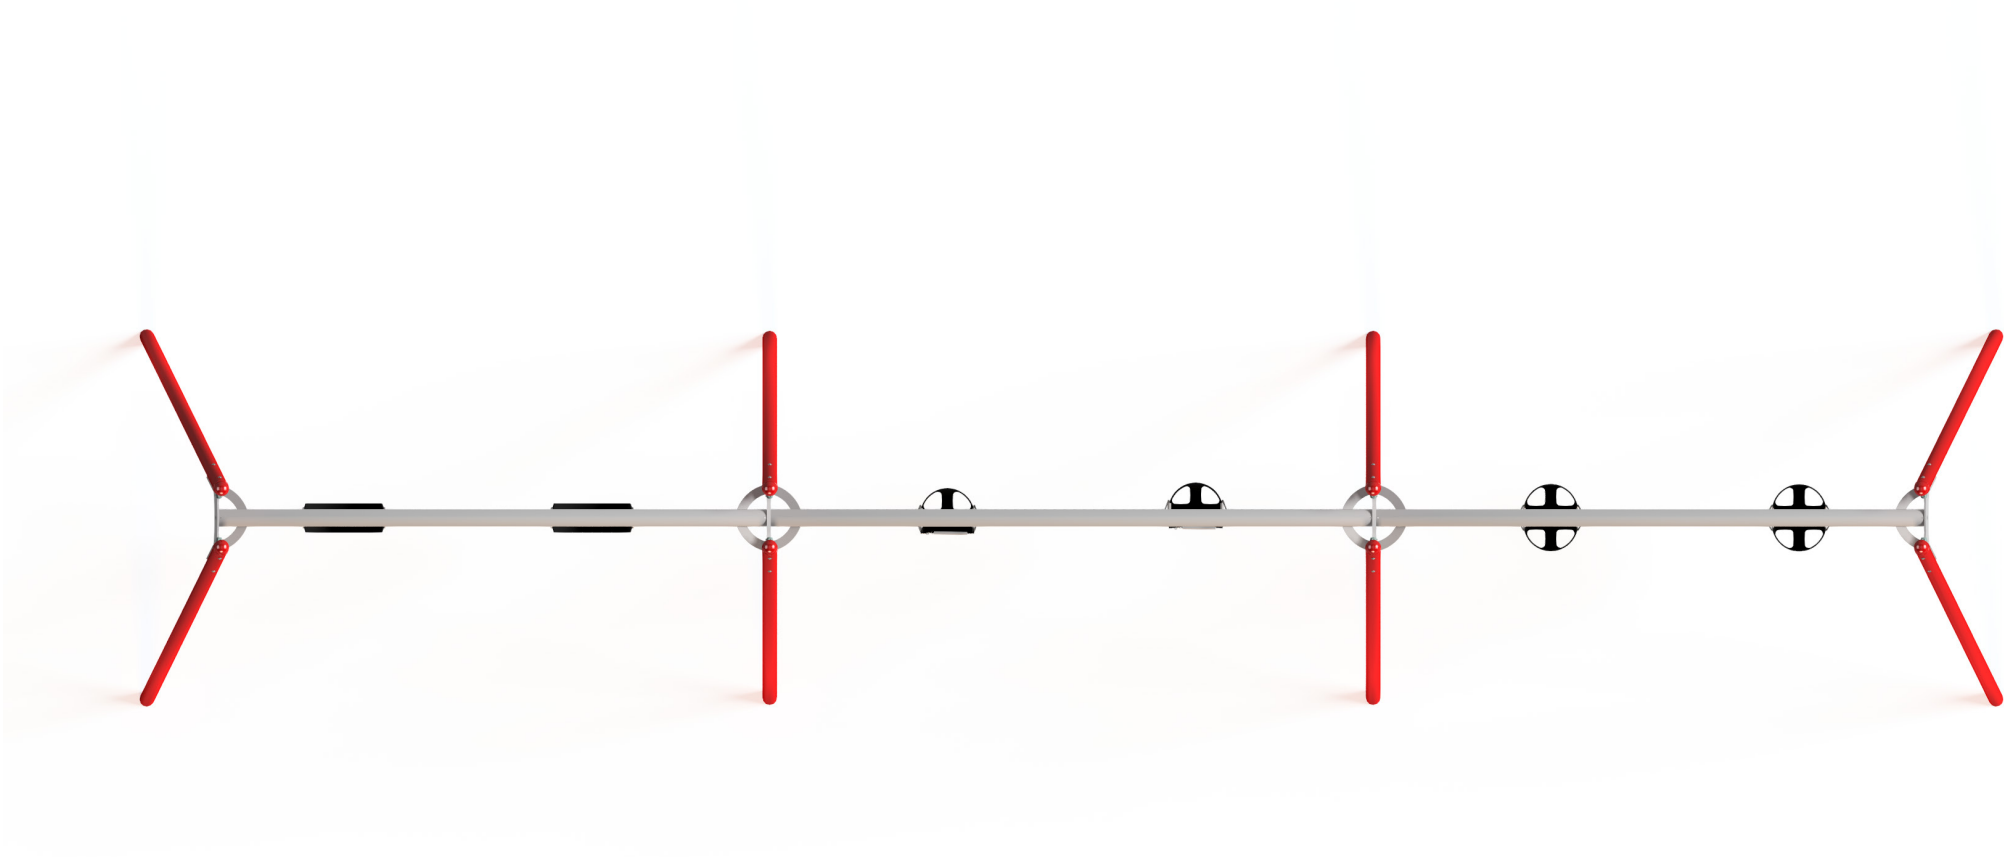


6 Bay Deluxe Swing - 2 VR - 2 TWC - 2 INF

Fallzones for Loose Fill Applications

1:100 @ A3

DIMENSIONS AT GROUND LEVEL

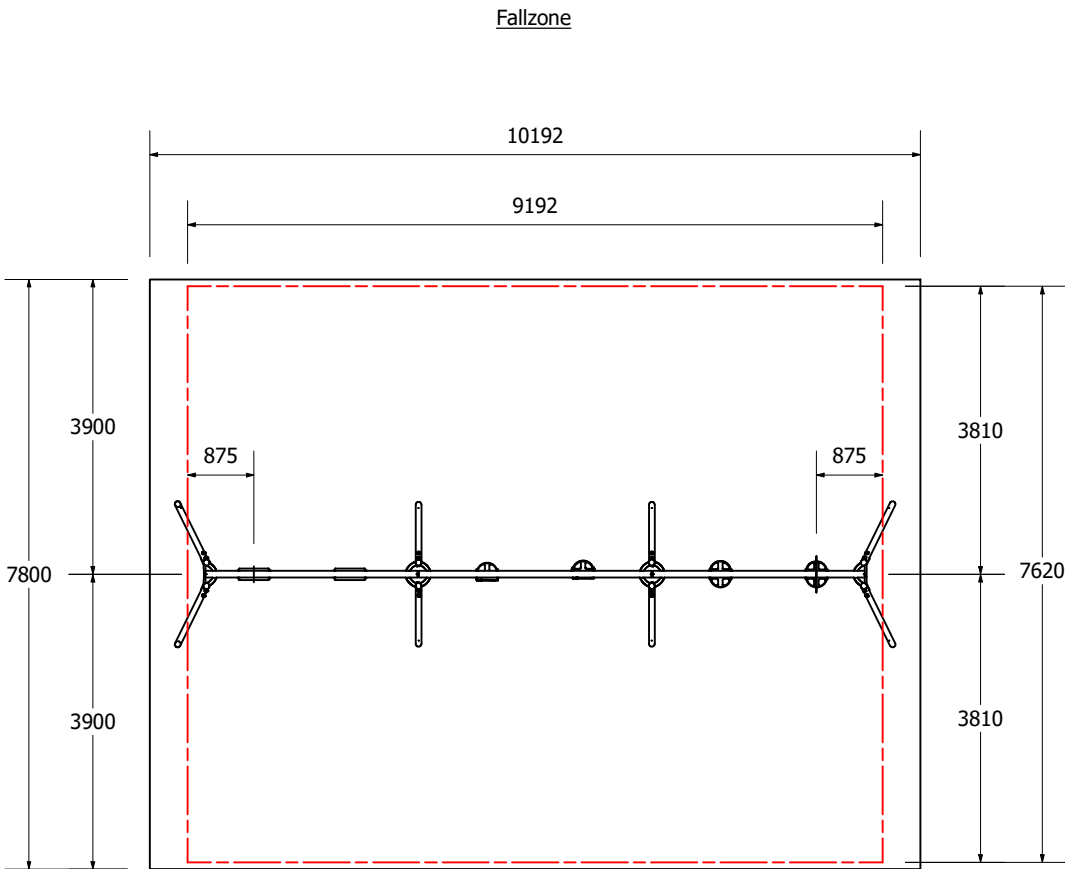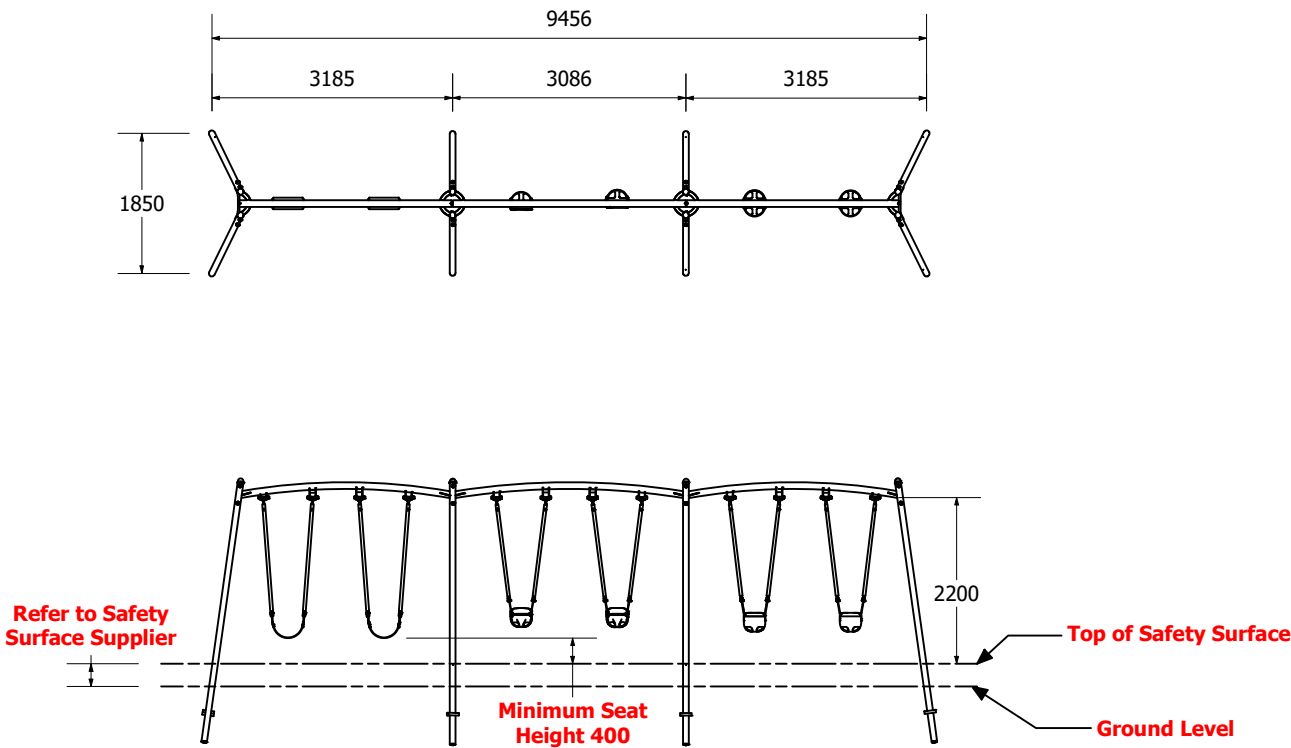

Technical Information	
Legend - 6 Bay Deluxe Swing 2200	
	Suggested Fall Zone
	Minimum Fall Zone As Per AS4685:2014/ NZS5828:2015
	Flush With Safety Surface/ No Obstacles
Free Height Of Fall : 1300mm	
NOTE MINIMUM FALL ZONES CALCULATED OFF MINIMUM SEAT HEIGHT	
Heaviest Part	35 kg

REVISION HISTORY			
REV	DESCRIPTION	DATE	BY
0	Creation	26/07/2018	



1:100 @ A3

6 Bay Deluxe Swing - 2 VR - 2 TWC - 2 INF

Fallzones for Synthetic Surface Applications

1:100 @ A3

DIMENSIONS AT GROUND LEVEL

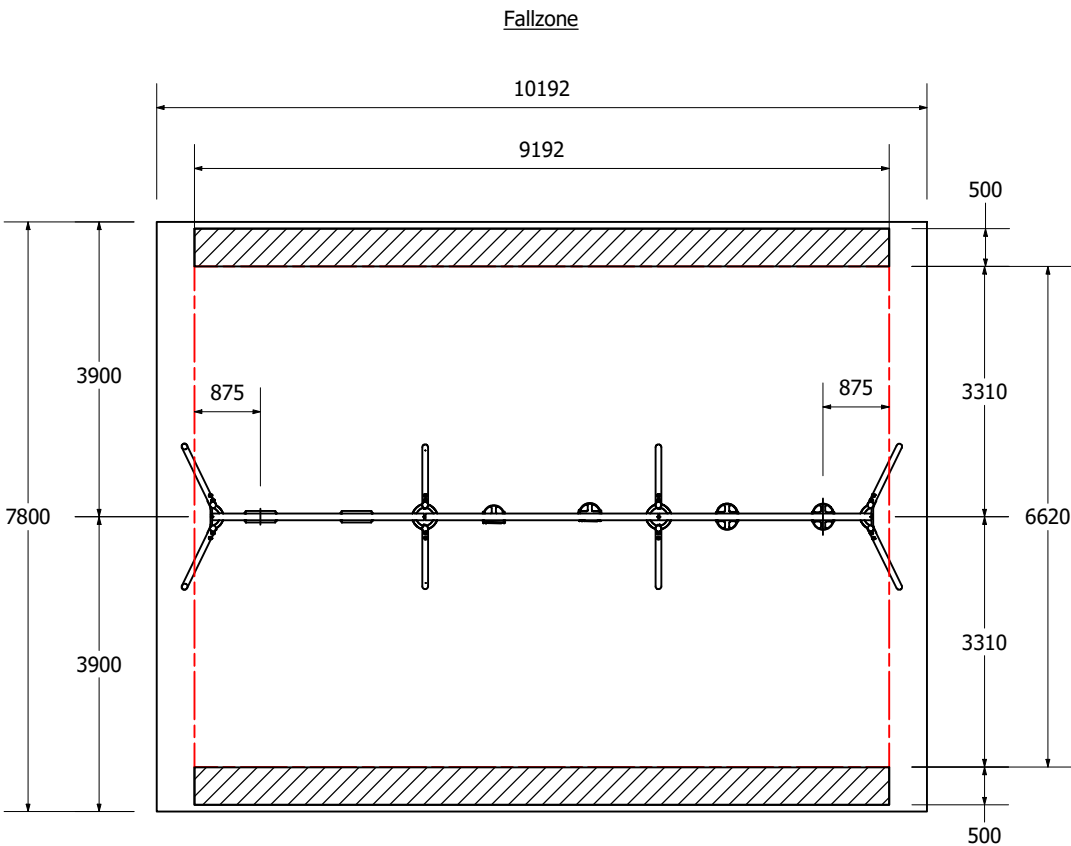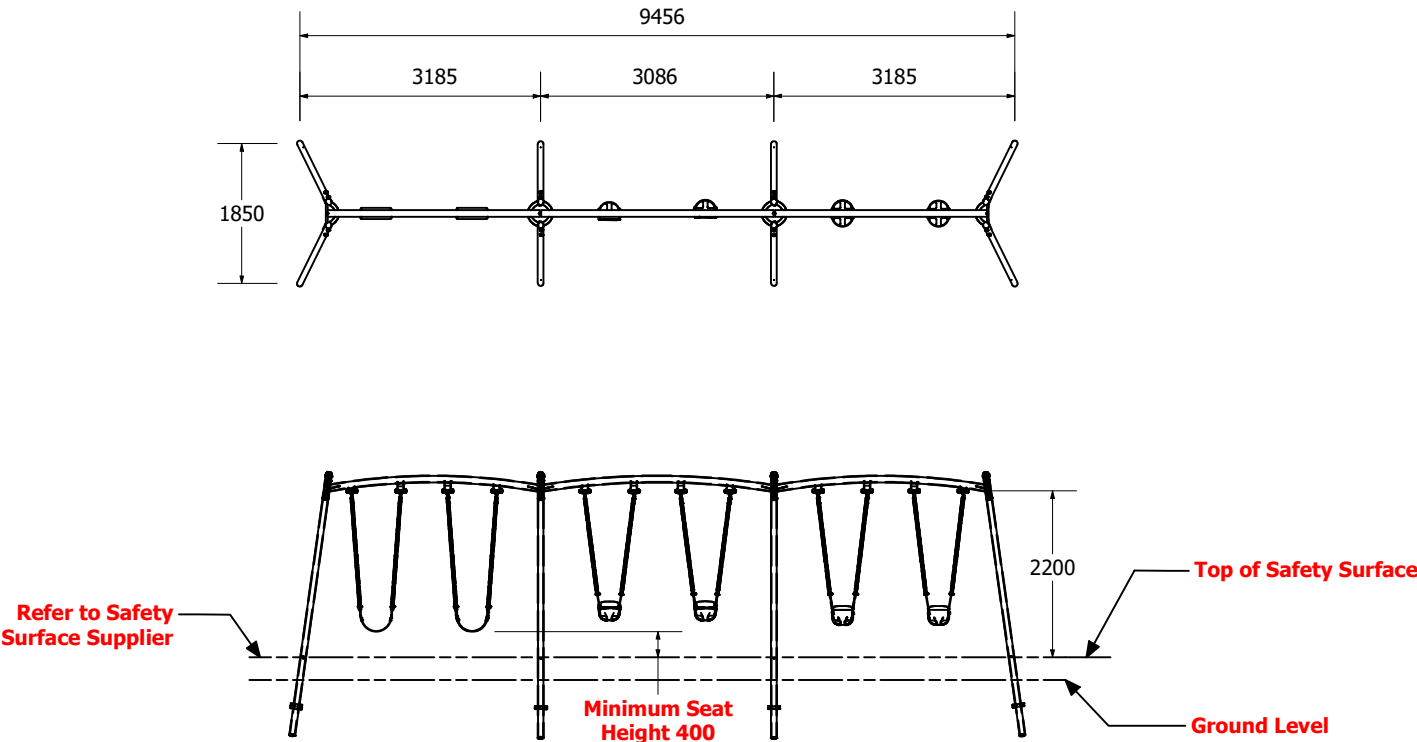

Technical Information	
Legend - 6 Bay Deluxe Swing 2200	
	Suggested Fall Zone
	Minimum Fall Zone As Per AS4685:2014/ NZS5828:2015
	Flush With Safety Surface/ No Obstacles
Free Height Of Fall : 1300mm	
NOTE MINIMUM FALL ZONES CALCULATED OFF MINIMUM SEAT HEIGHT	
Heaviest Part	35 kg