



Supa-Three Swings

On this swing 3 users swing towards each other which adds a different dimension to the basic swing. Large flat rubber seats.

Safety, Quality, Durability and Usability:



- Certified to NZS5828:2004
- Conditional 25 Year Warranty
- Triple Coat Protective Powdercoating
- Force 10 Swing Hangers
- Self-Supporting Frame
- Minimal Maintenance
- Vandal Resistant
- Heavy Duty

Age groups appropriate for:



Development Benefits

- BAL** Balance
- CO-ORD** Co-ordination
- GMS** Gross motor skills
- SD** Social Development

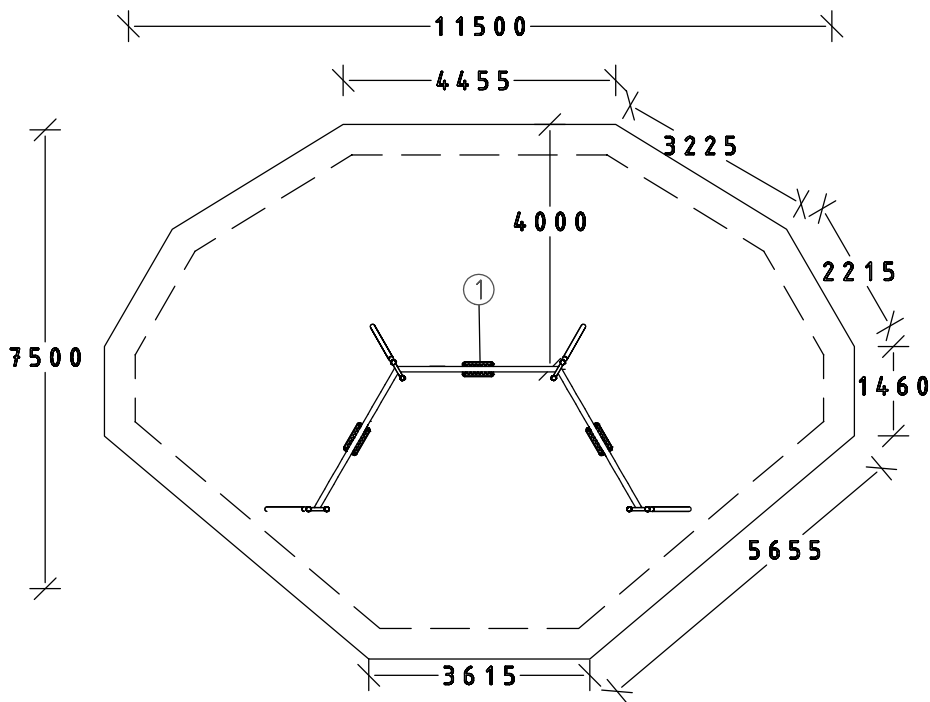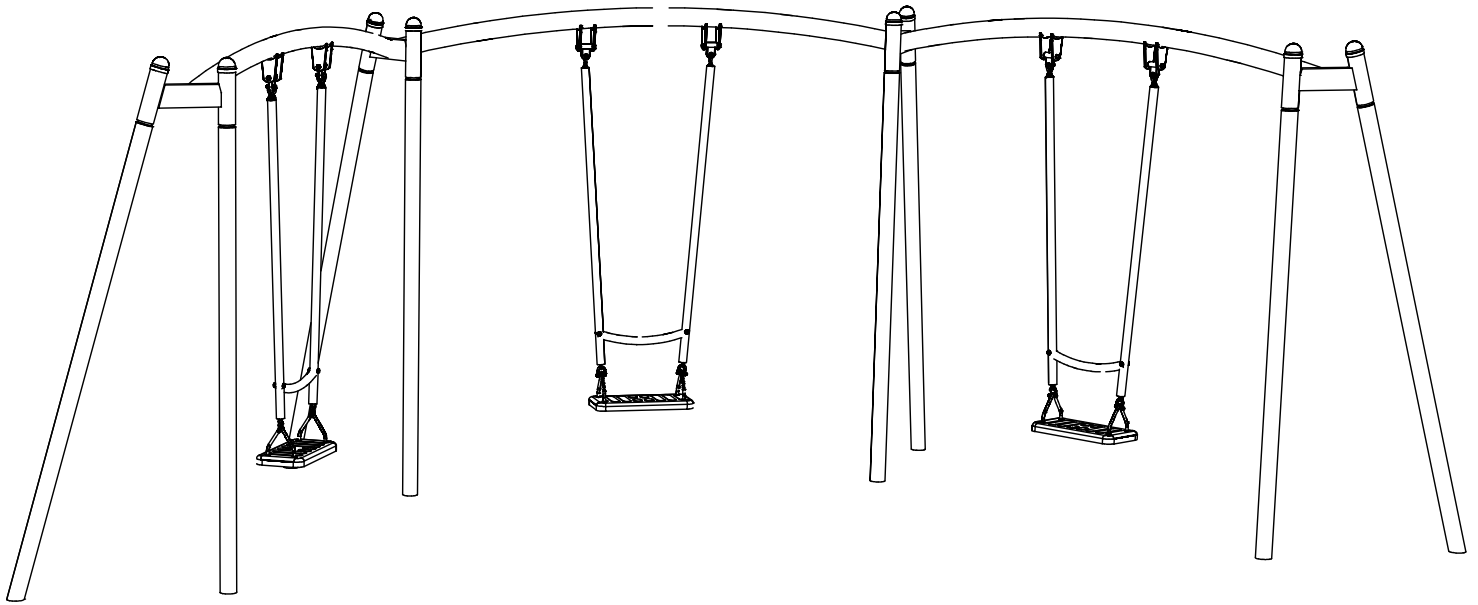

Min. Safety Surface required	Minimum
Area	81m ²
Surrounds 300 x 50	33m
Bark/Cushionfall	24.5m ³
Pegs	34
Max height of structure from safety surfacing	2.6m

Pole Depths & Footings:
Refer to Diagram Engineering Specification
For Platforms And Poles