




0800 PLAY 4 U  
0800 7529 48

Copyright c26.03.10 (PC2010.376)

# Single Slide Play - 376

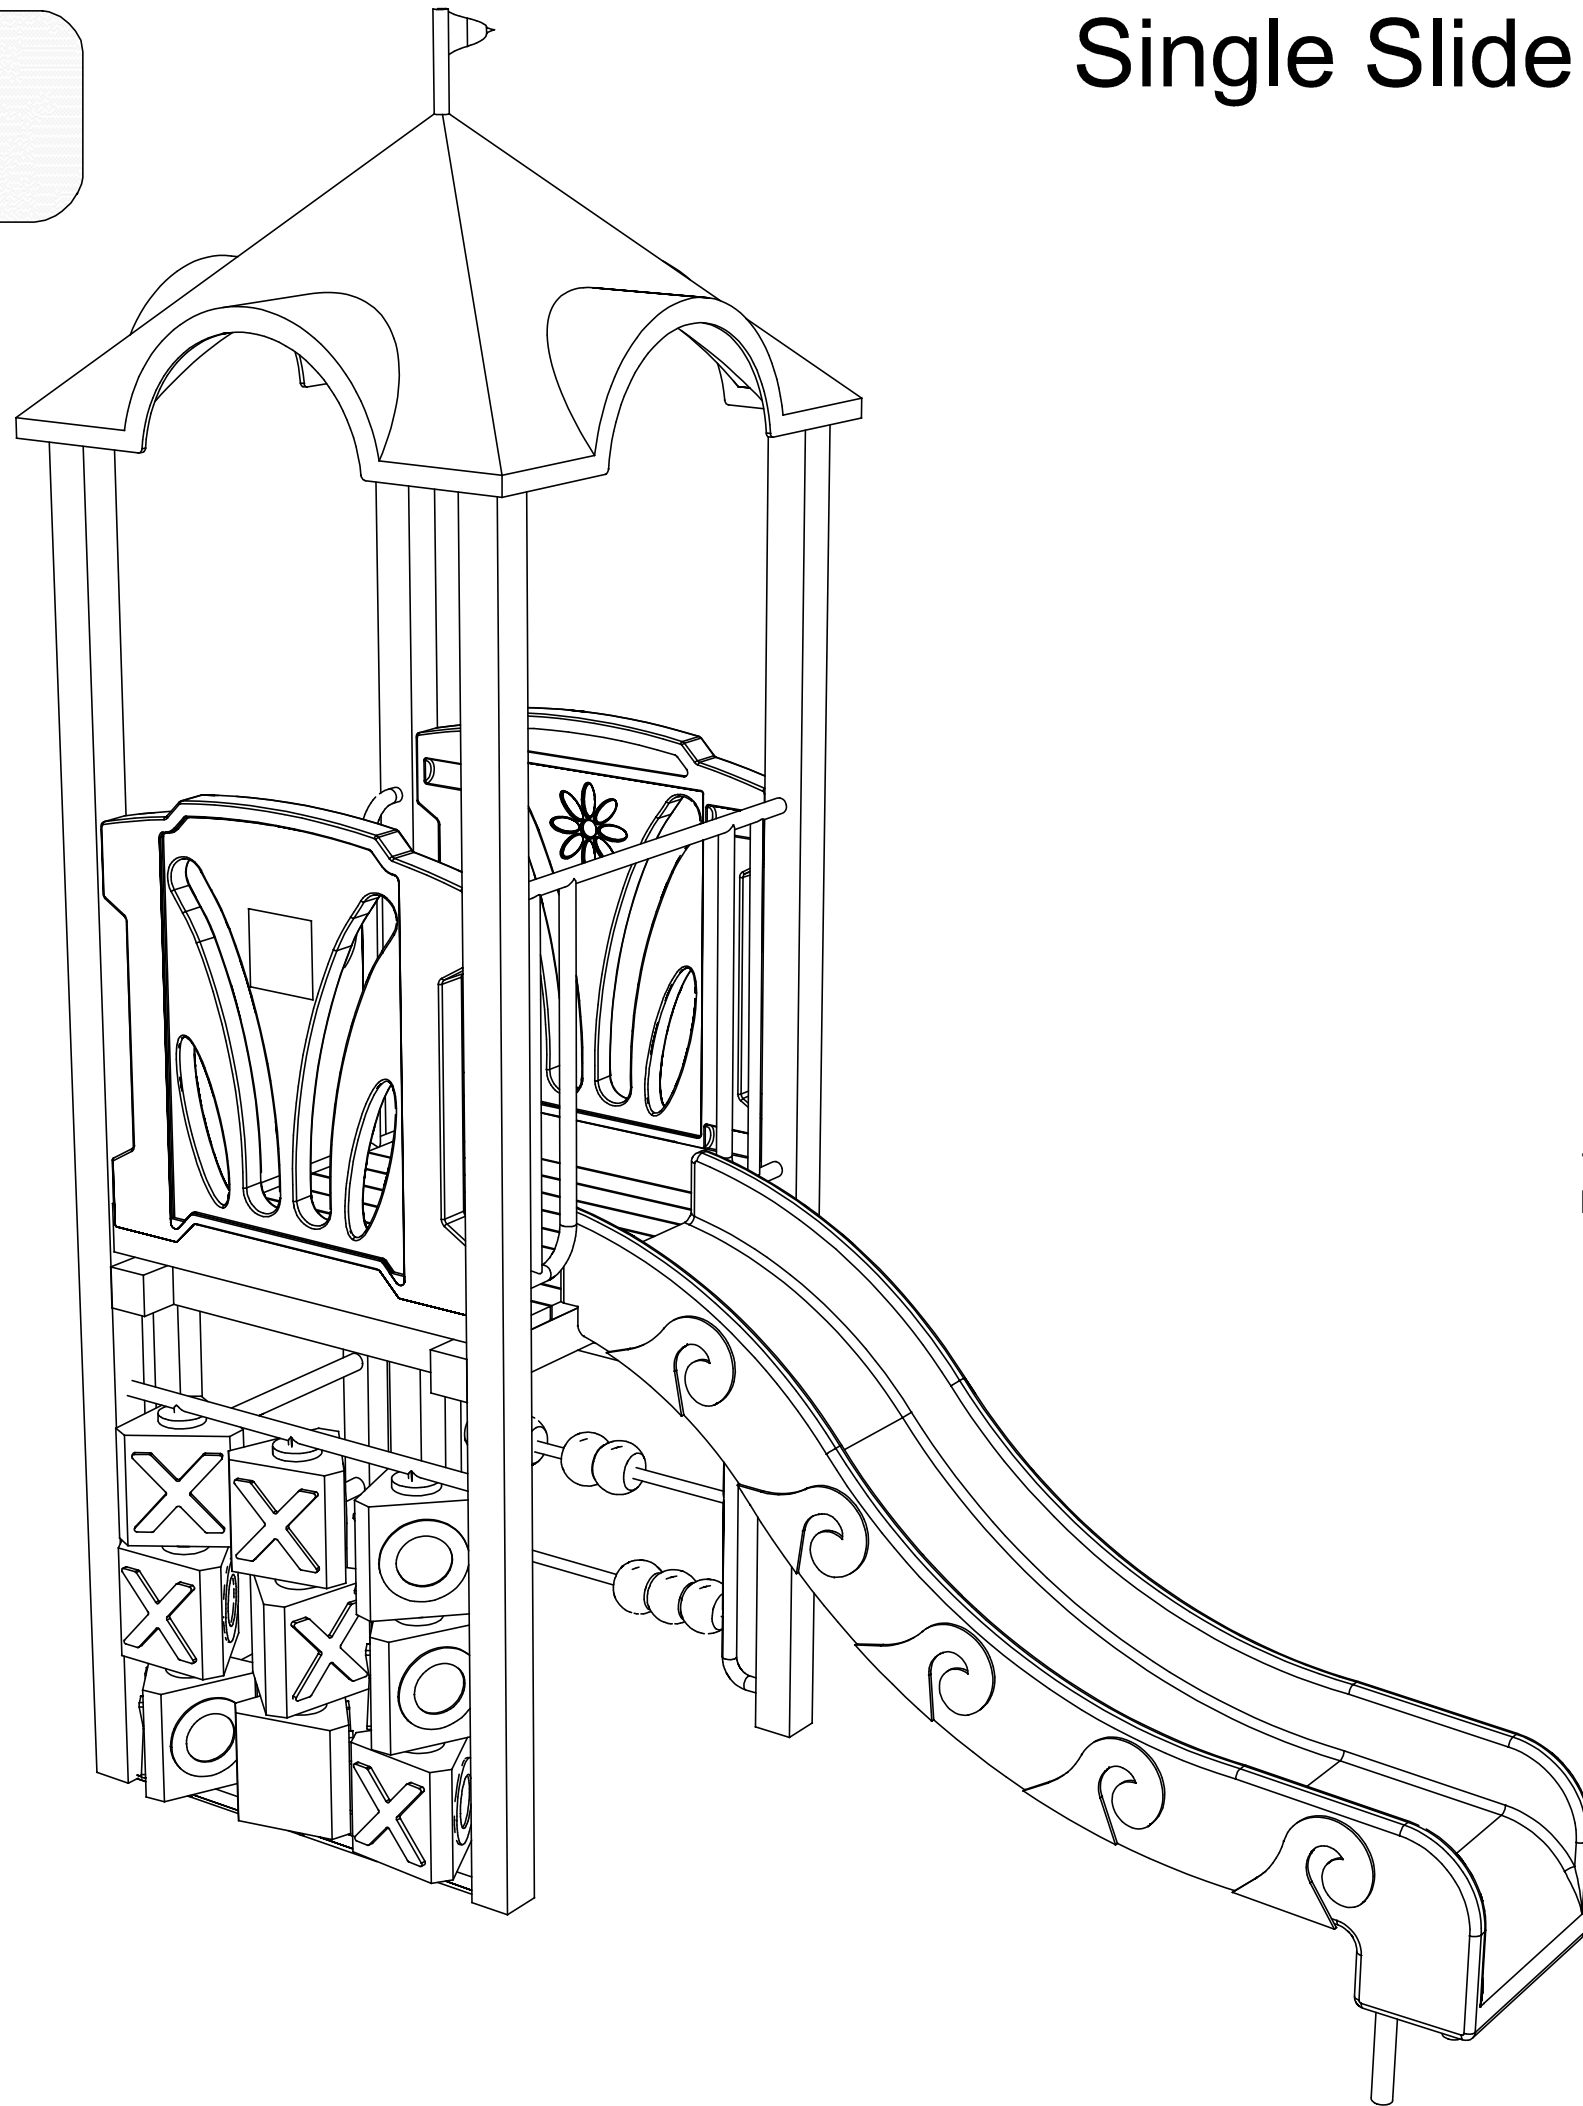

Engineering Certification for Platforms & Poles Sheet 3 Foundations In Good Ground

TYPE A	TYPE B	TYPE C	TYPE D
TIMBAPLAY POST - poles up to and including 3800	METAPLAY POST - poles up to and including 3800	METAPLAY/TIMBAPLAY POSTS - poles 3900 to 4800 inclusive SWINGS - 2-Bay & 3-Bay	JUSTO PLATFORM i.e 4 standard - covered with timber roof SWINGS - 4-Bay & Multi
All 17.5MPa CONCRETE Machine or Hand-mixed			
<b>Ø of Post Footings</b> 250mm 65x65 metaplay 75x75 metaplay ø75 ex 100x100 timbaplay 300mm ø140 timbo/ø114 meta All Swings 400mm ø180 timbaplay For post details see sheet 1		<b>Activities</b> 	

- Tic Tac Toe Panel & Frame
- Nature Panel with Steering Wheel
- Entry Support
- Abacus
- Nature Panel
- Cubby Roof with Flag
- Koru Wave Slide 1.20m

Copyright ©  
**timbaplay**

ISO 9001 Signed and approved for ISO 9001 quality control

Date:

Signed and approved by customer:


Date:

# Single Slide Play - 376

## TimbaPlay

## Mistletoe/Blue/yellow/red

Item No.	Drawing Ref	Description	Variable Length	Colour	Qty	col	pkd	ch
Accessories								
2		Tic Tac Toe Panel & Frame -		Yellow	1			
7		Abacus -		Bright Red	1			
Ladder								
3		Ladder Timba 1.20m Vertical -		Silver	1			
Platform								
10		Std Timbaplay Platform (90mm) -		Wood	1			
Roof								
1		Cubby Roof with Flag -		Yellow	1			
Safety Barrier								
4		Entry Support -		Bright Red	1			
5		Nature Panel with Steering Wheel -		Pommel Blue	1			
6		Nature Panel -		Bright Red	1			
8		Slide Barrier -		Bright Red	1			
Slide								
9		Koru Wave Slide 1.20m -						
9.1		Koru Plastic Wave Slide		Pommel Blue	1			
9.2		Slide Support Leg		Galv	1			
Poles								
		P3.8 - 90mm Square		Wood	4			
		Hardware and Plans						
		Loctite						
DISPATCHED VIA		CONS, NOTE		P/S		DISPATCHED BY		

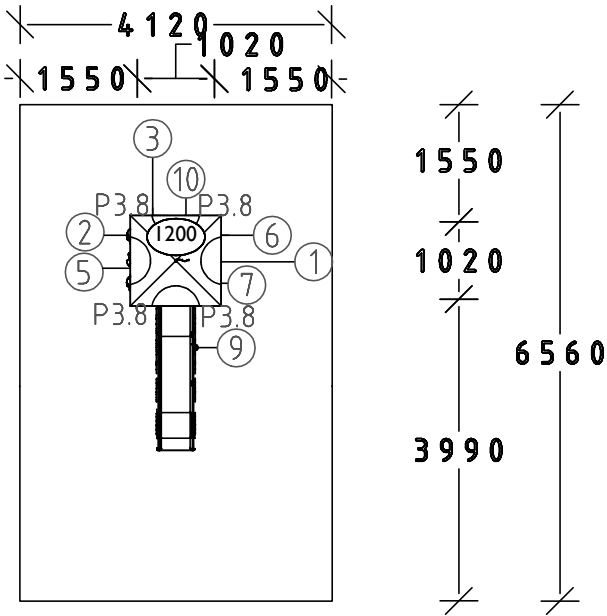

## Construction Site Plan

- 1: Safety surfacing MUST NOT be installed before playground
- 2: PLATFORM HEIGHTS: the heights on this plan are from the top of the safety surfacing - not ground level
- 3: Measurements are approximate only and must be confirmed on site prior to installation of safety surfacing
- 4: • Denotes hand grips in our Timbaplay system ■ Side panels

Tick age group of users: Preschool  5 - 7yrs  8 - 10yrs  11+

Kitset  Supervision  Fully Installed   
 Customer..... Order Date.....  
 ..... Del. Date.....  
 ..... Contact.....  
 Deliver to..... Phone School.....  
 Job No..... A/H.....

Safety Surfacing  Bark  Cushionfall  Matting

Min. Safety Surface required	Minimum
Area	27m
Surrounds 300 x 50	21m
Bark/Cushionfall	8.1m
Pegs	20
Max height of structure from safety surfacing	3691m

Pole Depths:  
See Engineering Specifications on Sheet 3